
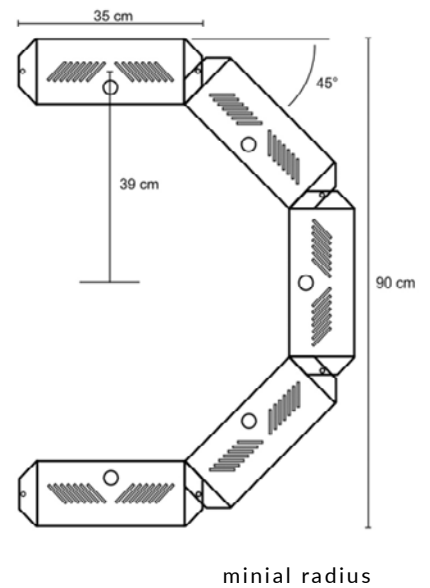


Configuration transparent, flexible/curvable
 Pixel Pitch 40,00 mm /
 Transparenz **75%**

Please note that this is a basic datasheet for rental customers and planning. Extensive documentation and manuals are available - we encourage you to get in touch if you consider this material for use in dry-hire jobs.

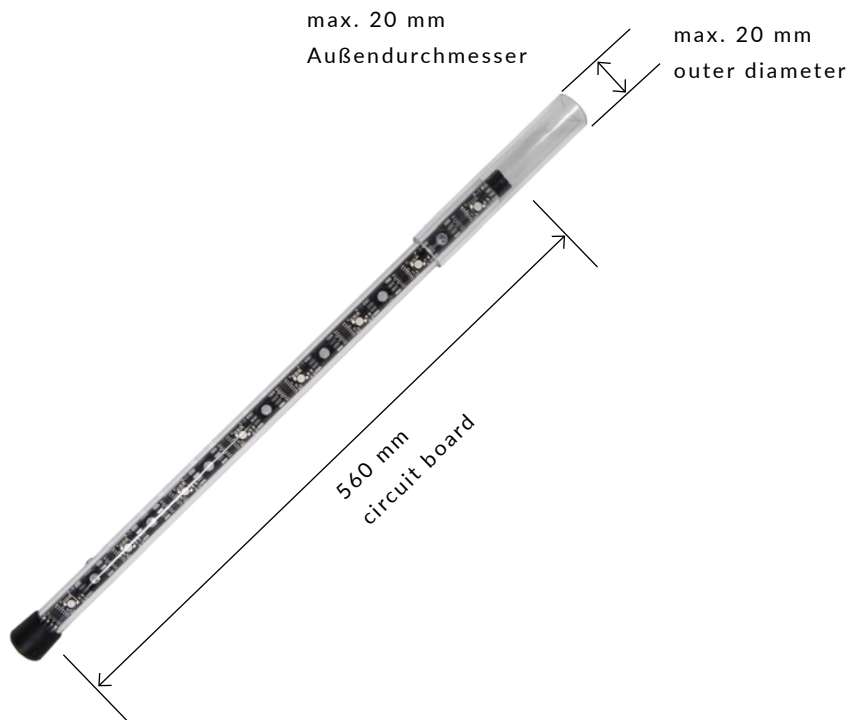

curveLED® P40.0

Technical Overview			
Pixelpitch	40,0 mm	Protection Grade	IP54
Configuration	SMD black-face LED	Transparency	75% at 40mm pixelpitch
Router, dimension W x H x D mm	3200 x 2650 x 1200	Avg. Power Consumption	0,3 W/px
Max. resolution	1920 x 1200 px	Working temp.	0-65°C
Brightness	2360 mcd/px		